



# 06H RoHS Compliant


## 贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 32VDC

测试标准:  
Testing Standard:  
UL248-1 UL248-14

额定分断能力:  
Interrupting Rating:  
50A

Time-Current Characteristics  
电流-时间曲线图

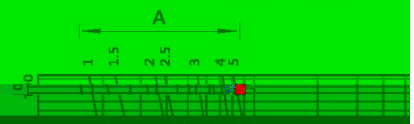

目录编号: Catalog No. D:32V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 I <sup>2</sup> T Melting Integral (A <sup>2</sup> ·s)	认证 Approvals
					●表示已获认证 ●表示认证中 
06H0250D	250mA	32V	D	0.00042	○
06H0375D	375mA	32V	E	0.00089	○
06H0500D	500mA	32V	F	0.0019	○
06H0750D	750mA	32V	G	0.0090	○
06H1100D	1A	32V	H	0.017	●
06H1150D	1.5A	32V	K	0.060	●
06H1200D	2A	32V	N	0.183	●
06H1250D	2.5A	32V	O	0.240	●
06H1300D	3A	32V	P	0.270	●
06H1400D	4A	32V	S	0.936	●
06H1500D	5A	32V	T	1.865	●
06H1600D	6A	32V	V	1.920	○
06H1700D	7A	32V	X	2.302	○
06H1800D	8A	32V	Z	3.015	○