




IGBT Discrete

V_{CE}	1200	V
I_C	15	A
$V_{CE(SAT)} I_C=15A$	1.85	V

Circuit



Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

Features

- Low $V_{CE(sat)}$ Trench-FS IGBT technology
- Maximum junction temperature 175
- Positive temperature coefficient
- Including fast & soft recovery anti-parallel FWD
- High short circuit capability(10us)

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-Emitter Breakdown Voltage	V_{CE}	1200	V
DC Collector Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_C	30 15	A
Diode Forward Current, limited by T_{jmax} $T_C=25^{\circ}C$ $T_C=100^{\circ}C$	I_F	30 15	A
Continuous Gate-Emitter Voltage	V_{GE}	± 20	V
Transient Gate-Emitter Voltage	V_{GE}	± 30	V
Turn off Safe Operating Area $V_{CE} 1200V$, $T_j 150^{\circ}C$		60	A
Pulsed Collector Current, $V_{GE}=15V$, t_p limited by T_{jmax}	I_{CM}	60	A
Diode Pulsed Current, t_p limited by T_{jmax}	I_{Fpuls}	60	A
Short Circuit Withstand Time, $V_{GE}=15V$, $V_{CC}=900V$, $V_{CEM} 1200V$	T_{sc}	10	μs
Power Dissipation, $T_j=175^{\circ}C$, $T_c=25^{\circ}C$	P_{tot}	200	W



Electrical Characteristics of the IGBT $T_j=25$ unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	1200		-	V
Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=0.5mA$	5.1	5.8	6.4	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=15A$ $T_j=25^\circ C,$ $T_j=125^\circ C$ $T_j=150^\circ C$		1.85 2.20 2.30	2.35	V
Zero Gate Voltage Collector Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V$ $T_j=25^\circ C,$ $T_j=$				



Electrical Characteristics of the Diode $T_j=25$ unless otherwise specified

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static						
Diode Forward Voltage	V_F	$I_F=15A$ $T_j=25^\circ C$, $T_j=125^\circ C$ $T_j=150^\circ C$		2.00 1.80 1.70	2.40	V

Switching Characteristic, Inductive Load

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at $T_j=25$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=600V, I_C=15A,$ $V_{GE}=-15V\sim 15V,$ $R_g=33$	-	45	-	ns
Rise Time	t_r		-	52	-	ns
Turn-on Energy	E_{on}		-	1.5	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	128	-	ns
Fall Time	t_f		-	186	-	ns
Turn-off Energy	E_{off}		-	0.9	-	mJ
Dynamic , at $T_j=125$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=600V, I_C=15A,$ $V_{GE}=-15V\sim 15V,$ $R_g=33$	-	50	-	ns
Rise Time	t_r		-	55	-	ns
Turn-on Energy	E_{on}		-	2.2	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	160	-	ns
Fall Time	t_f		-	135	-	ns
Turn-off Energy	E_{off}		-	1.3	-	mJ
Dynamic , at $T_j=150$						
Turn-on Delay Time	$t_{d(on)}$	$V_{CC}=600V, I_C=15A,$ $V_{GE}=-15V\sim 15V,$ $R_g=33$	-	52	-	ns
Rise Time	t_r		-	58	-	ns
Turn-on Energy	E_{on}		-	2.4	-	mJ
Turn-off Delay Time	$t_{d(off)}$		-	170	-	ns
Fall Time	t_f		-	138	-	ns
Turn-off Energy	E_{off}		-	1.45	-	mJ











Electrical Characteristics of the DIODE




Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Dynamic , at T_j= 25						
Diode Forward Voltage	V _{FM}	I _F = 15A	-	1.90	-	V
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=240A/μs,	-	7.5	-	A
Reverse Recovery Charge	Q _{rr}		-	1.8	-	μC
Reverse Recovery Energy	E _{rec}		-	0.60		mJ
Dynamic , at T_j= 125						
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=240A/μs,	-	9	-	A
Reverse Recovery Charge	Q _{rr}		-	2.4	-	μC
Reverse Recovery Energy	E _{rec}		-	0.9		mJ
Dynamic , at T_j= 150						
Reverse Recovery Current	I _{rr}	I _F =15A, V _R =600V, -di/dt=240A/μs,	-	9.5	-	A
Reverse Recovery Charge	Q _{rr}		-	2.6	-	μC
Reverse Recovery Energy	E _{rec}		-	1.0		mJ

Thermal Resistance



Parameter	Symbol	Max. Value	Unit
IGBT Thermal Resistance, Junction - Case	R _{th(j-c)}	0.75	K/W
Diode Thermal Resistance, Junction - Case	R _{th(j-c)}	1.35	K/W
Thermal Resistance, Junction - Ambient	R _{th(j-a)}	40	K/W

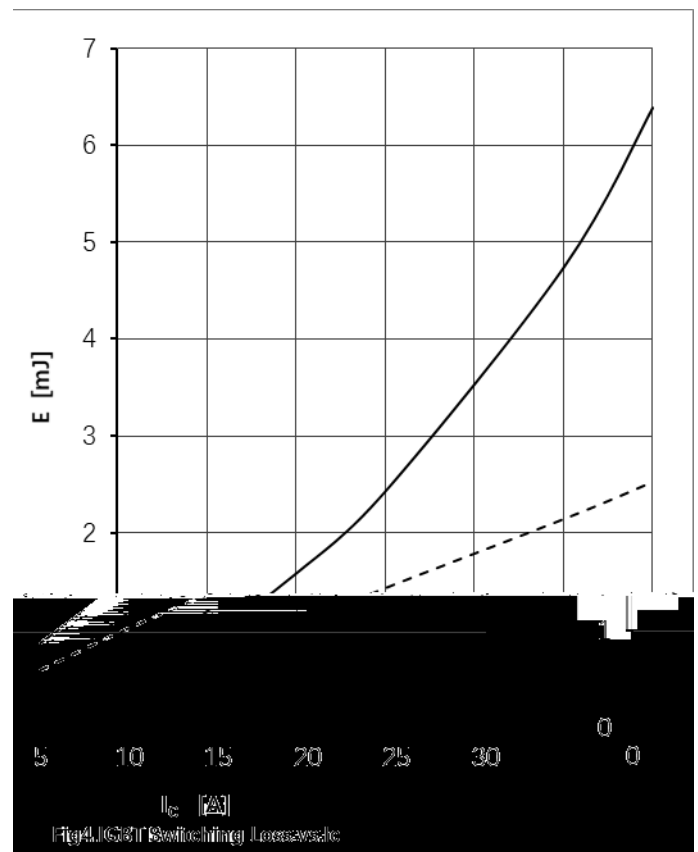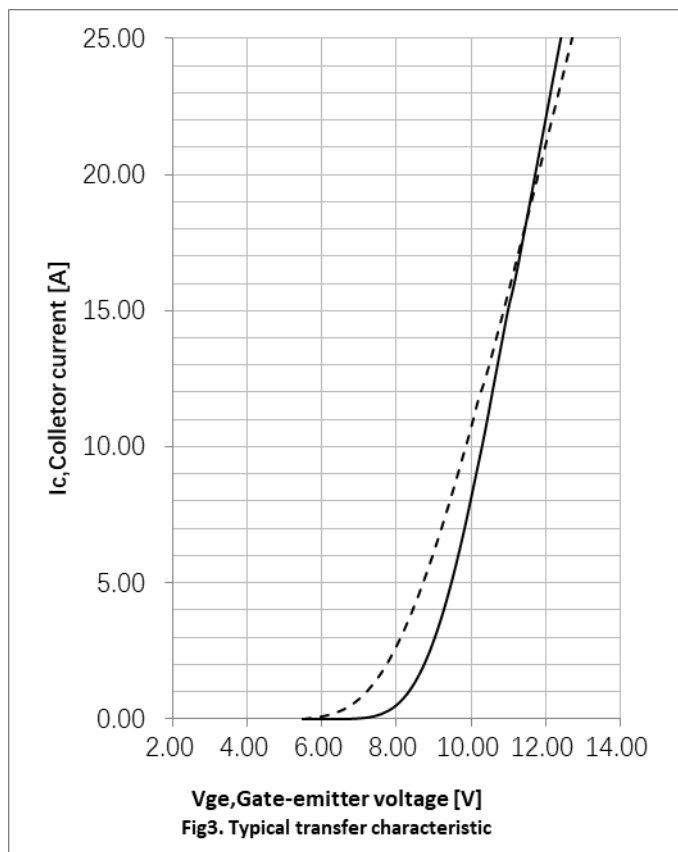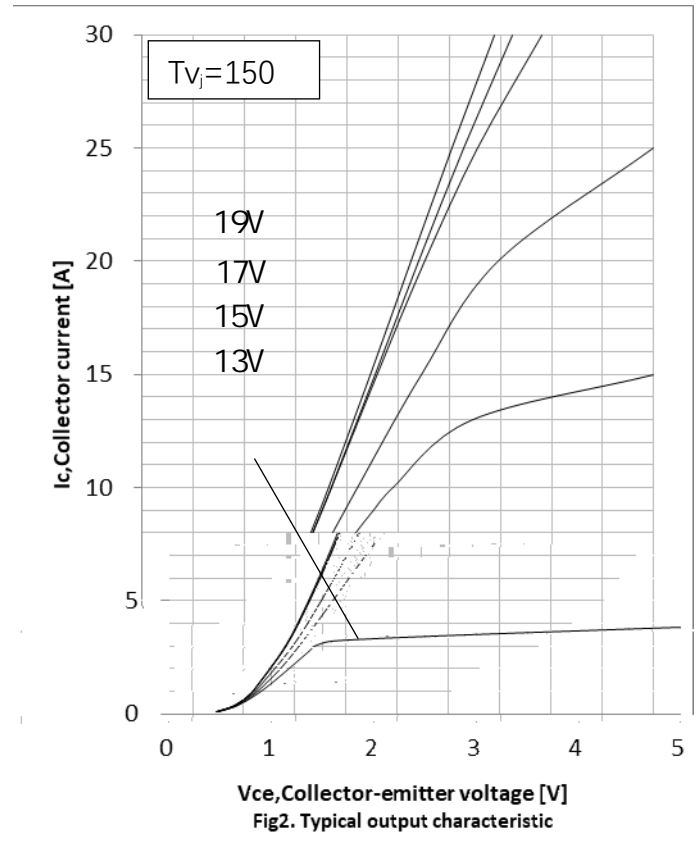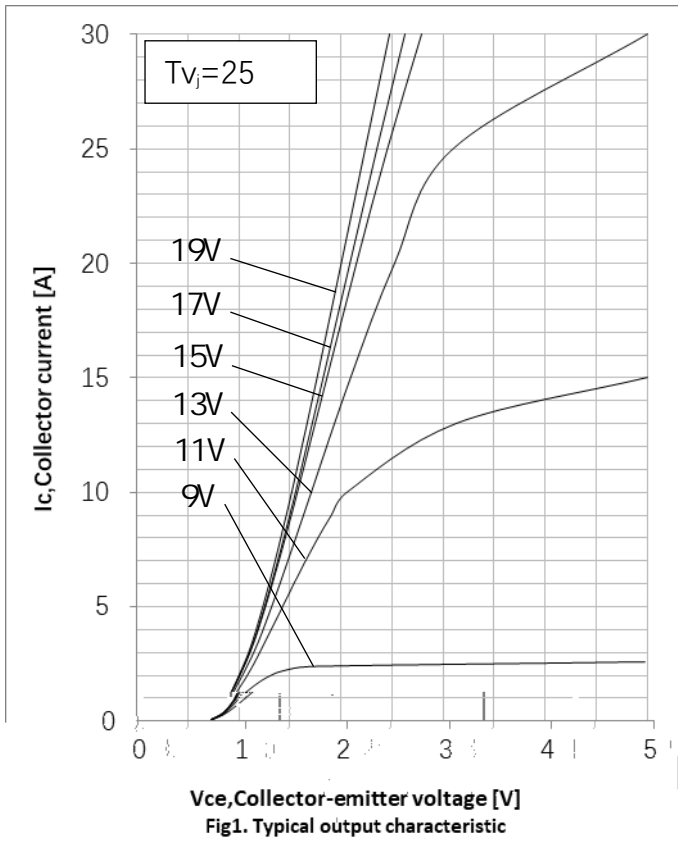

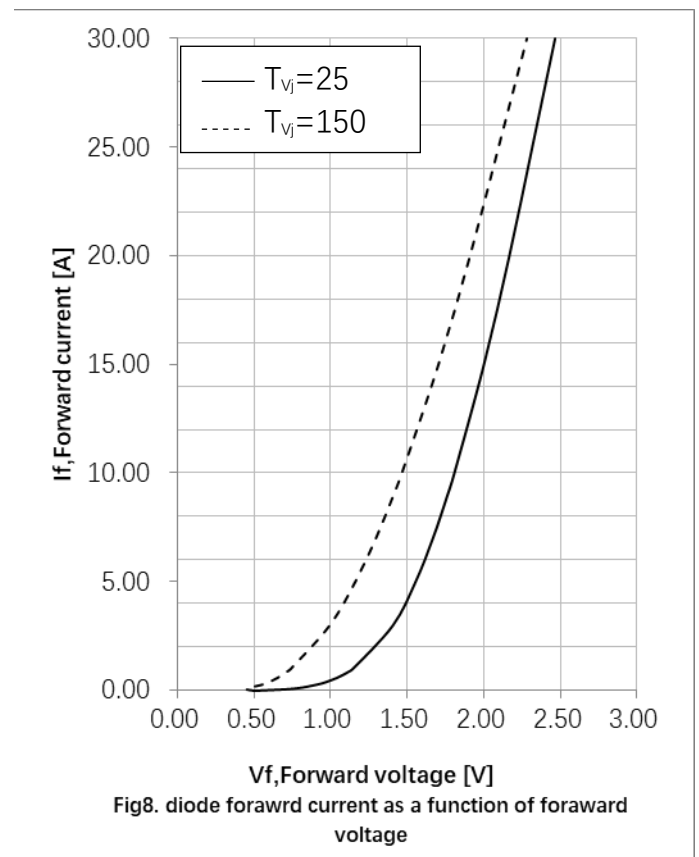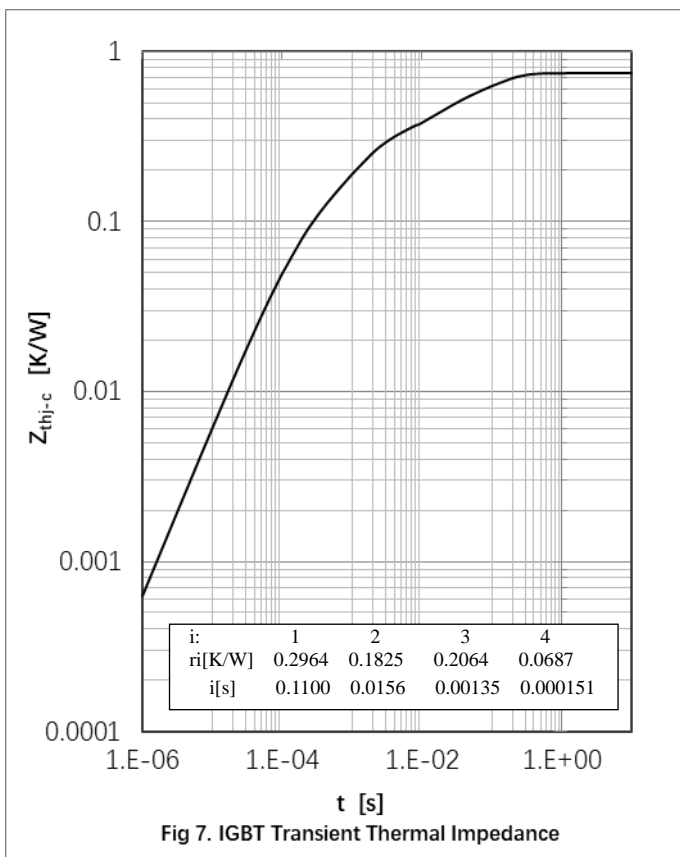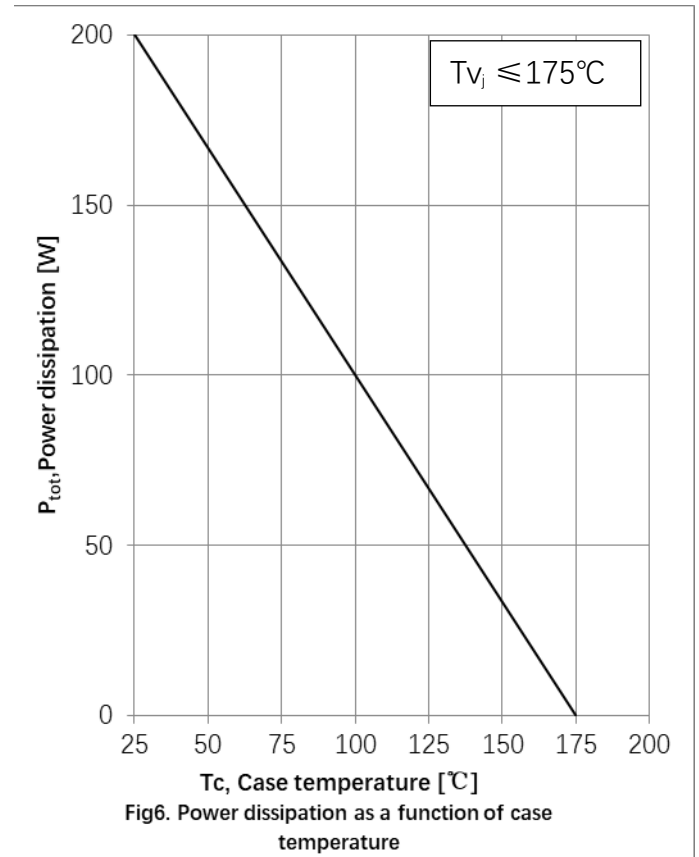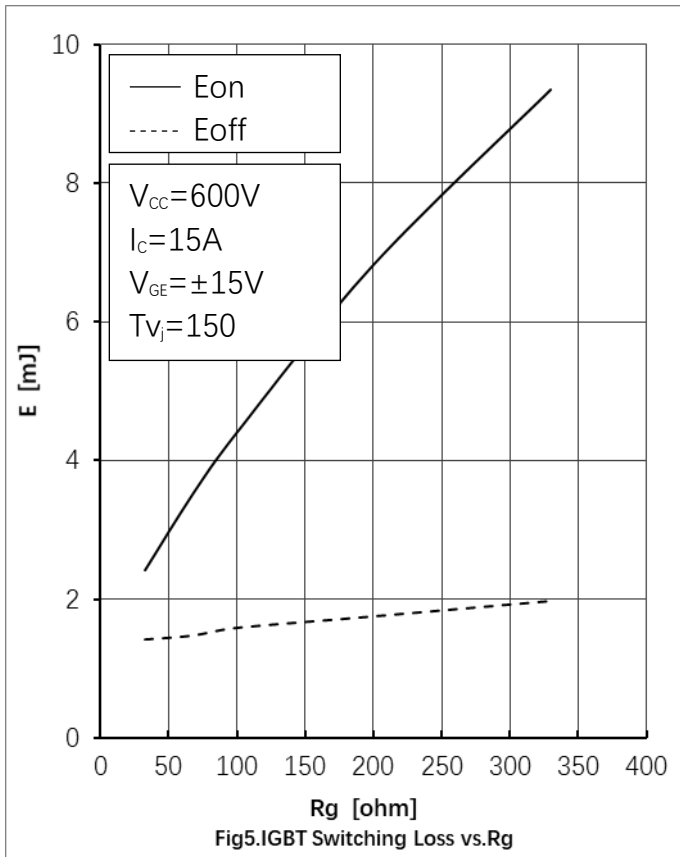

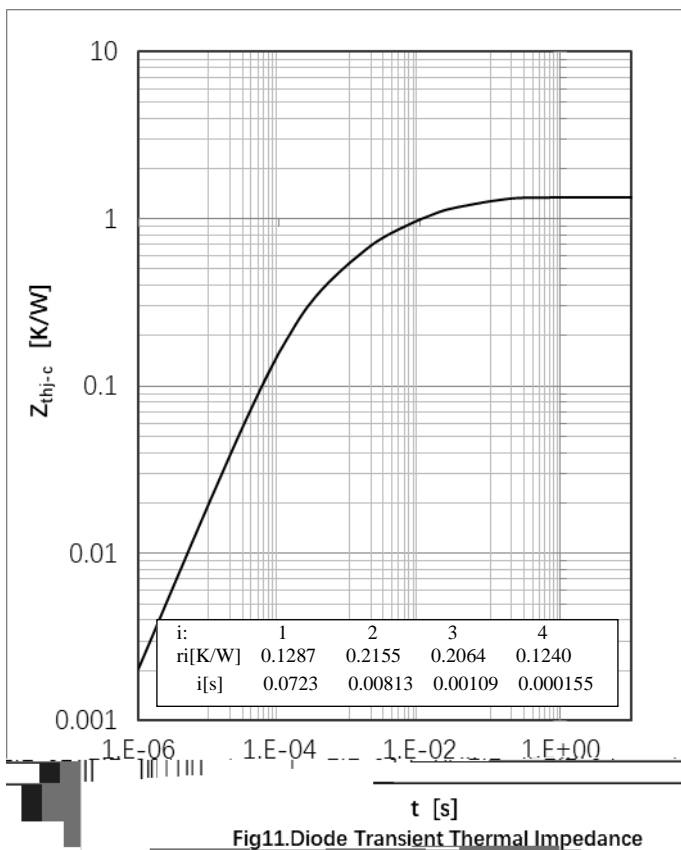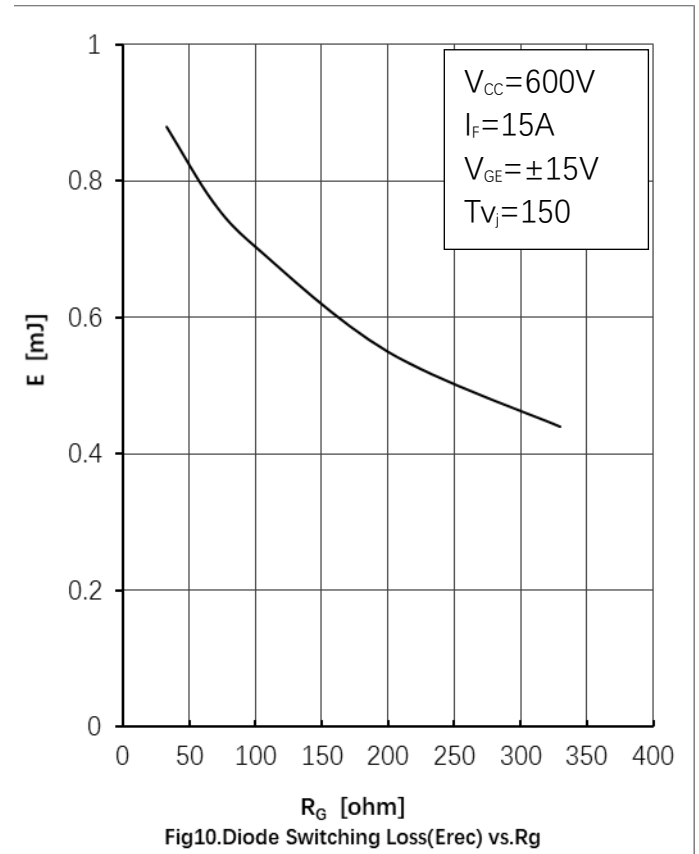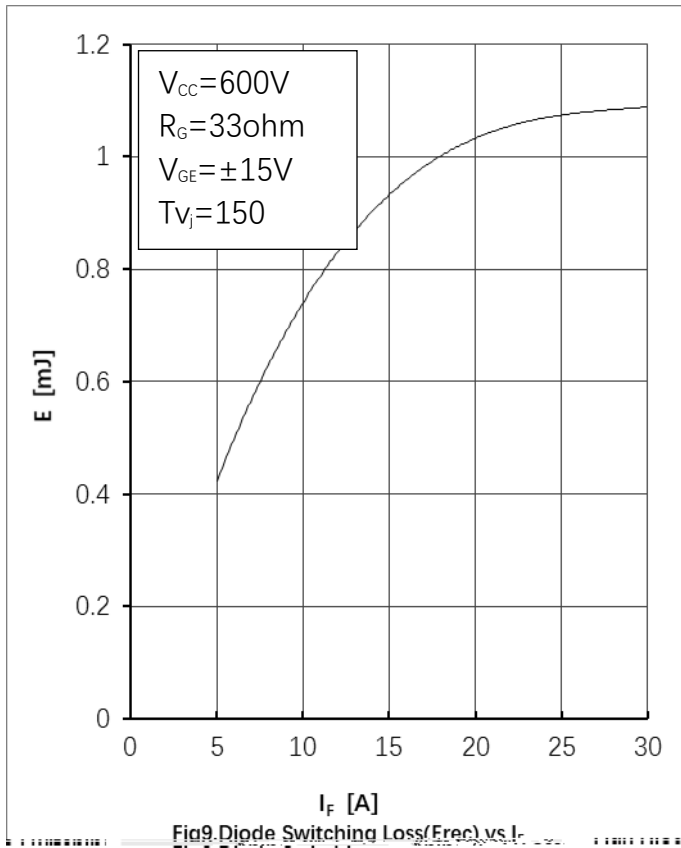

● Circuit Diagram

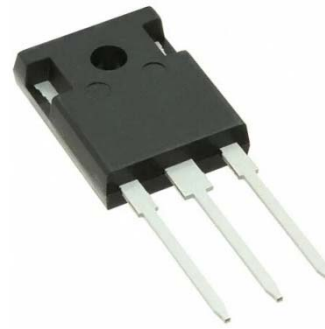

● Package Outline Information

CASE: TO 247

