



贴片保险丝





50 Ampere at 125V (100mA~20A)

工作温度:
Operating Temperature: -55°C ~ +125°C

材料:
Materials:
End cap: Ag plated brass
Ceramic tube: ceramic

焊接方法:
Soldering Method:
Reflow soldering: 260°C, 10s max
Manual soldering: 380°C, 3s max

包装:
Packaging:
Automaton taped 1000PCS per reel,

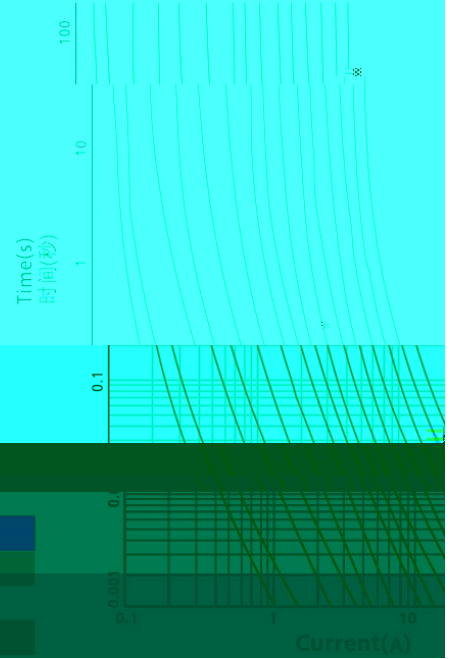

电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time |
|---------------------------|--------------------|
| 100% | 4 hours Min(大于4小时) |
| 200% | 1s~60s |

