

SB4040S 40A SCRs

FEATURES

• High thermal performance

- High voltage capacity

- Very high current surge capability

APPLICATIONS

- Line rectifying 50/60 Hz

- Softstart AC motor control

- DC Motor control


- Power converter

- AC power control

- Lighting and temperature control

Parameters Summary

JL/JL/PJ200V600V 1000V50A40A40A40A

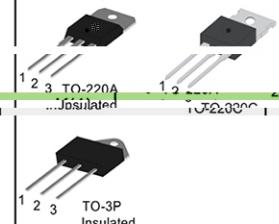

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T _{stg}	-40~150	°C
Operating junction temperature range	T _j	-40~150	°C
Repetitive peak off-state voltage	V _{DRM}	1200/1600	V
Repetitive peak reverse voltage	V _{RRM}	1200/1600	V
Non repetitive surge peak Off-state voltage	V _{DSM}	V _{DRM} +100	V
Non repetitive peak reverse voltage	V _{RSM}	V _{RRM} +100	V
Non repetitive surge peak on-state current	I _{TSM}	420	A
RMS on-state current (180° conduction angle)	I _{T(RMS)}	40	A
Average on-state current (180° conduction angle)	I _{T(AV)}	25	A
I ² t value for fusing (tp=10ms)	I ² t	880	A ² S
Critical rate of rise of on-state current (I = 2×IGT, tr ≤ 100 ns)	di/dt	150	A/μS
Peak gate current	IGM	4	A
Peak gate power	PGM	5	W


Thermal Resistances

Symbol	Parameter	Value	Unit
R _{th(j-c)}	Junction to case (DC)	0.8	°C/W



Electrical Characteristics (T=25°C unless otherwise specified)	
I_{DRM}	120A
V_{DSS}	1600V (VRM: 1200V)
I_{TM}	60A tp=380μs
V_{BR}	2000V (VRB: 1200V)
I_{RM}	100A
V_D	1200V (VRD: 1600V)
I_{AV}	60A
V_{YD}	200V (VRY: 120V)
Δt	12°C
t_{RMS}	1000ms
t_{AV}	100ms

Characteristics	
Symbol	Parameter
V_{DSS}	$I_{TM} = 60A \text{ tp}=380\mu s$
I_{DRM}	$V_D = V_{DSS} = V_{BR}$
I_{RM}	$V_D = V_{DSS} = V_{BR}$


Ordering Information Scheme

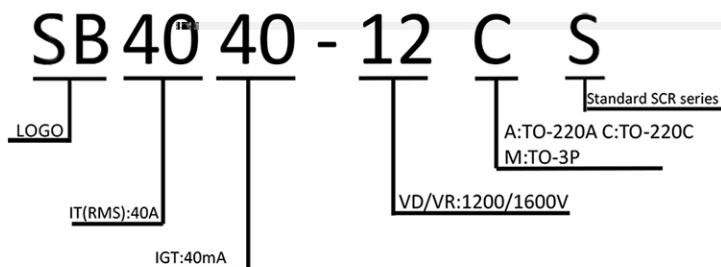

TO-220A Package Mechanical Data

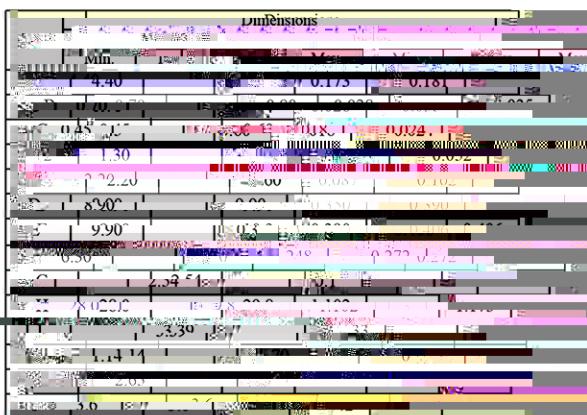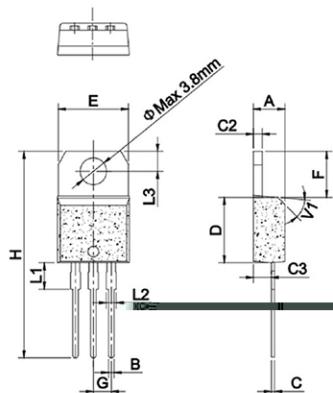


TO-220C Package Mechanical Data

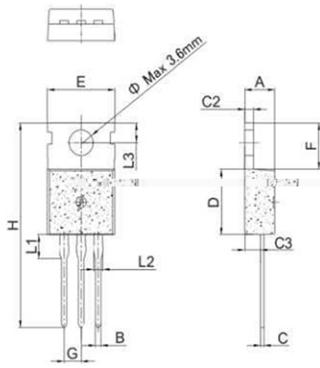

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.30		1.48	0.048	0.049	0.052
C3	2.20		2.60	0.087	0.092	0.102
D	10.48	10.49	10.50	0.410	0.410	0.410
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
e		3.6			0.142	

TO-3P Package Mechanical Data

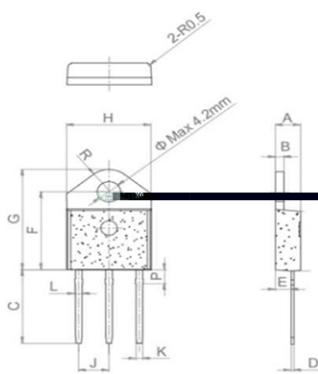

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	1.40		1.60	0.055		0.062
C	15.48		15.88	0.609		0.625
C2	0.50		0.70	0.019		0.027
C3	2.70		2.90	0.106		0.114
D	10.52	10.52	10.52	0.412		0.412
E	20.27		20.67	0.798		0.815
F	15.15		15.35	0.590		0.604
G		5.45			0.214	0.216
H	1.10		1.30	0.043		0.051
L1	1.15		1.35	0.045		0.053
L2	2.68		3.08	0.105		0.121
L3		4.20			0.165	
e	4.40		4.60	0.173		0.181

FIG.1 Maximum power dissipation versus on-state current

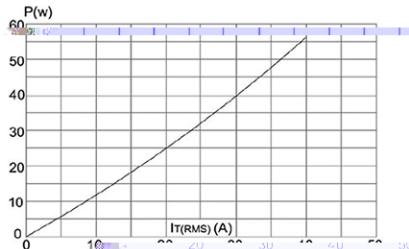


FIG.3: Surge peak on-state current versus number of cycles

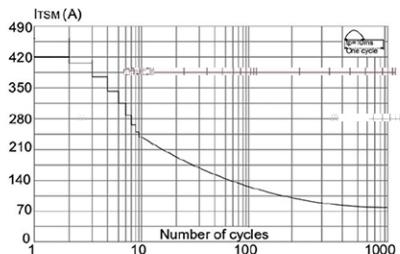


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10ms$, and corresponding value of $|dI/dt|$ ($|dI/dt| < 50A/\mu s$)

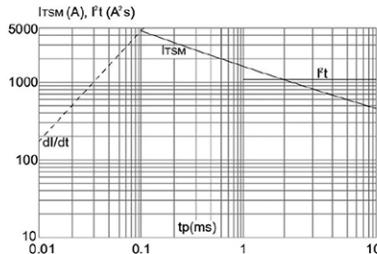


FIG.2: on-state current versus case temperature

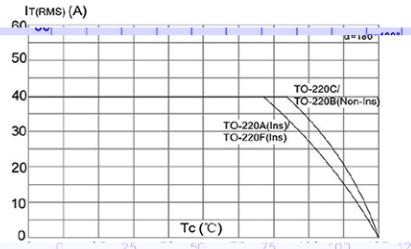


FIG.4: On-state characteristics (maximum values)

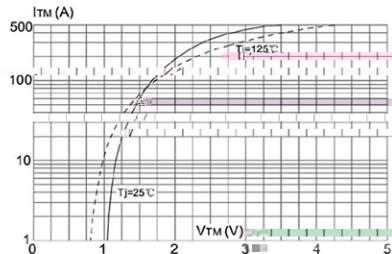


FIG.6: Relative variations of gate trigger current holding current and latching current versus junction temperature

