



## Dual High Voltage Schottky Rectifier

**Features:**

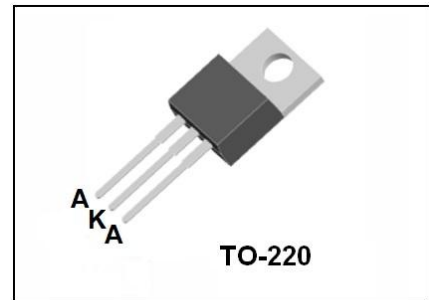

**Application:**

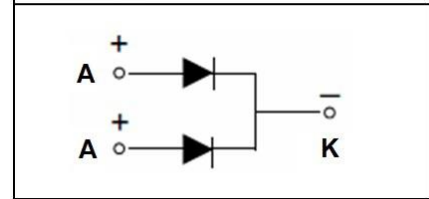


### Absolute Maximum Ratings( 2 ° )


Symbol	Parameter	Value	Unit
		100	
		100	
( )	, 120°C	10( ) 20( )	
	, .3	1 0	
		1 0	°
		- +1 0	°

### Typical Performance Characteristics


**Figure 1. Forward Current Characteristics**

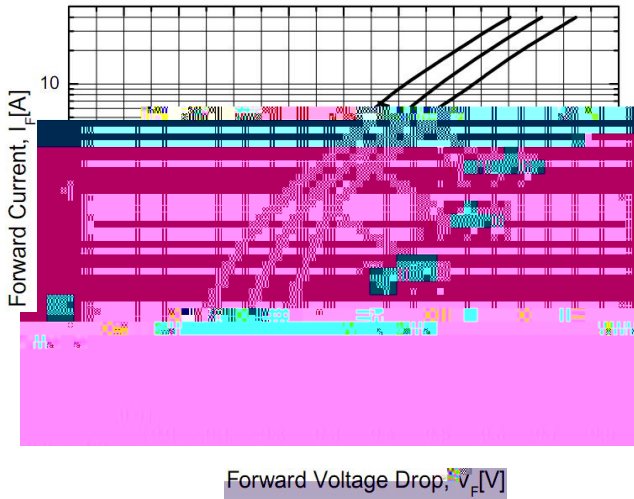


**Figure 2. Reverse Leakage Current**

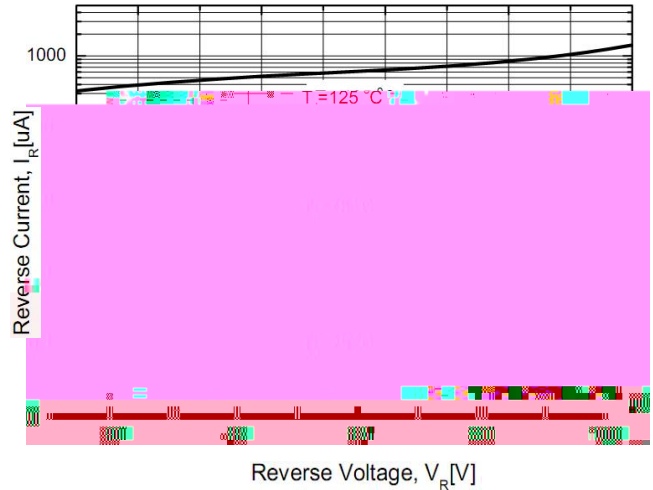

**Figure 3. Junction Capacitance**

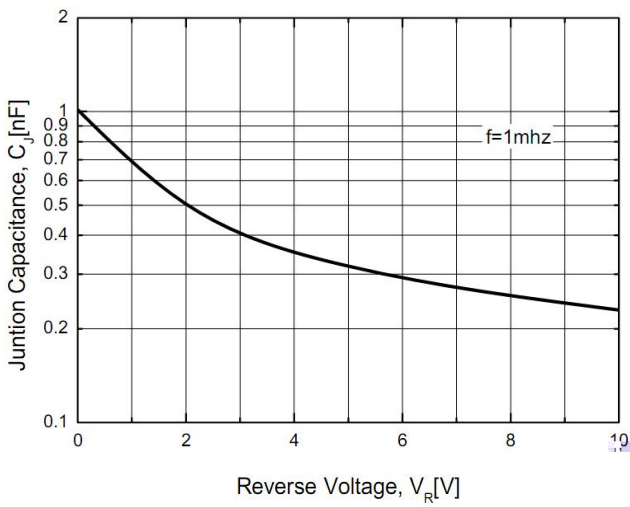

**Figure 4. Power Derating**

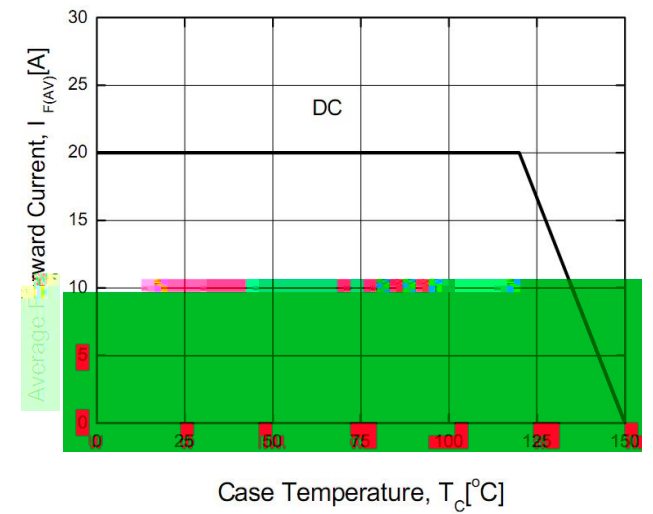

**TO-220 MECHANICAL DATA**

	.00	. 0		. 0		10. 0
	1.1	1.			2.	
1	0. 0	1. 0		1.10		1. 0
1	0.	0.		12. 0		1 . 0
	0.30	0. 0	1	2. 0	3. 0	3. 0
	1 . 0	1 . 0		2. 0		3.10
1	. 0	. 0	1	2.00		3.00
				3. 0		.00

